

烤豬爐 (熱反射式) Pig Roaster (Heat radiant Type)




特徵與優點

- 採用熱反射原理，傳熱平均，有效提昇熱效率
- 配備管狀爐頭及熱反射板，預熱時間縮短至七分鐘，較傳統烤豬爐節省四倍時間
- 活動式熱反射板可輕易拆出清洗
- 高質全不銹鋼構造，符合食物安全標準及確保高抗蝕性以提昇產品耐用度
- 配備熄火安全制及感應線，如若火種熄滅，主氣會於約60秒內自動截斷
- 標準配件包括點火棒方便操作

Features and Benefits


- Thanks to the Heat Radiant Roasting technique, the even distribution of heat on the roaster surface helps to make high quality roast efficiently and effectively
- Equipped with powerful bar burner and heat radiant panel, pre-heat time takes only 7 minutes which is 4 times faster than conventional pig roaster
- The design of removable heat radiant panel is easy for cleaning
- Flame failure device (thermocouple) cuts off the gas supply if the pilot flame is out to avoid gas leakage
- Equipped with pilot lighter

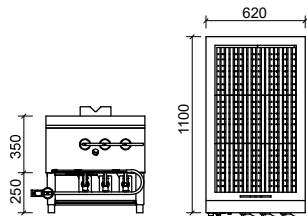

CAUTION 警告

During operation, operator must not put any lava rock, charcoal or other solid obstacles on top of heat radiant panel. Splash water on heat radiant panel is also forbidden. Fail to do so will cause severe panel damage. 運作時，嚴禁擺放石球，炭或其他硬物於熱反射板上。切勿在熱反射板直接灑水。上述行為會嚴重損壞熱反射板。

爐頭連熱反射板示意
Diagram of burner with heat radiant panel.

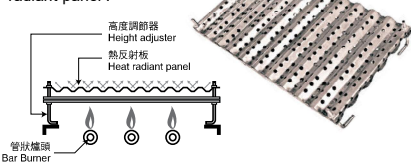

型號 Model No. ▶		PRO-3A-GHR
闊 x 深 x 高 (毫米)	Width x Depth x Height (mm)	620 x 1100 x 600
淨重 / 毛重 (公斤)	Net / Gross Wt. (kgs)	230 / 290
熱輸入量 千瓦 (英熱單位 / 小時) / 操作氣壓 (水柱毫米)		
Heat input kW (BTU / hr.) / Operating Pressure (mm water column)		
煤氣	Town Gas	62 (211606) / 100
石油氣	L.P. Gas	62 (211606) / 280
天然氣	Natural Gas	62 (211606) / 200
燃料駁口 (毫米)	Fuel pipe connection (mm)	Ø25
煤氣 / 石油氣 / 天然氣	Town Gas / L.P. Gas / Natural Gas	

備註	
此產品適合:	煤氣, 石油氣, 天然氣使用 (採購前必須列明氣體種類)
如欲查閱CE / ETL認證型號, 請參照CE / ETL系列產品目錄	
Remarks	
Fuels suit for:	Town Gas, L.P. Gas, Natural Gas (Pls specify gas type when ordering).
Please refer to CE / ETL booklet for CE / ETL certified models.	

印度式烤爐 Tandoori Oven




特徵與優點

- 配強力爐頭連熱反射板，內置熄火安全裝置。
- 內膽缸選用印度進口特質黏土製造，外包高質隔熱材料。
- 高質全不銹鋼構造，符合食物安全標準及確保高抗蝕性以提昇產品耐用度。
- 另備黑麻石檯面以供選擇。


Features and Benefits

- Equipped with powerful burner and heat radiant panel plus built-in Flame Failure Device for safe operation.
- High quality imported Indian special clay pot chamber for effective insulation.
- Constructed with full stainless steel exterior for hygiene, food safety and resistance to corrosion and oxidation.
- Optional black granite oven top for your selection.

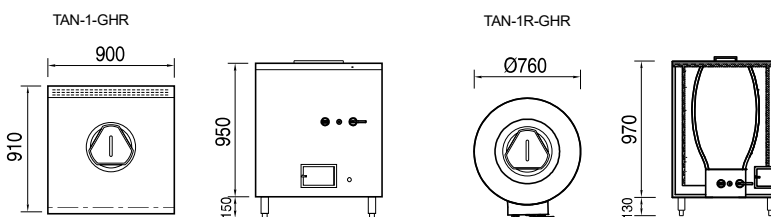

標準配件 Standard Accessories

1. 不銹鋼針支 Stainless Steel Pin
2. 不銹鋼鏟支 Stainless Steel Spade
3. 不銹鋼L型勾支 Stainless Steel Elbow Hook



另備 (黑麻石) 檯面以供選擇
Optional Top Finish (Black Granite)

型號 Model No. ▶		TAN-1-GHR	TAN-1R-GHR
闊 x 深 x 高 (毫米)	Width x Depth x Height (mm)	900 x 910 x 1100	Ø760 x 1100
淨重 / 毛重 (公斤)	Net / Gross Wt. (kgs)	300 / 350	280 / 330
熱輸入量 千瓦 (英熱單位 / 小時) / 操作氣壓 (水柱毫米)			
Heat input kW (BTU / hr.) / Operating Pressure (mm water column)			
煤氣	Town Gas	13 (44369) / 100	
石油氣	L.P. Gas	11.5 (39249) / 280	
天然氣	Natural Gas	13.5 (46075) / 200	
燃料駁口 (毫米)	Fuel pipe connection (mm)	Ø20	
煤氣 / 石油氣 / 天然氣	Town Gas / L.P. Gas / Natural Gas		

備註	
標準配件:	● 不銹鋼針支 ● 不銹鋼鏟支 ● 不銹鋼L型勾支
另選檯面:	● 黑麻石檯面
此產品適合:	煤氣, 石油氣, 天然氣使用 (採購前必須列明氣體種類)

Remarks	
Standard accessories:	● Stainless Steel Pin ● Stainless Steel Spade ● Stainless Steel Elbow Hook Tip
Optional oven top:	● Black Granite Top Finish
Fuels suit for:	Town Gas, L.P. Gas, Natural Gas, (Pls specify gas type when ordering).