

## 平頭爐 Boiling Table




BTO-4A-G150

### 特徵與優點

- 配文華爐頭連高質生鐵爐花
- 高質全不銹鋼構造，符合食物安全標準及確保高抗蝕性以提昇產品耐用度
- 配備熄火安全制及感應線，如若火種熄滅，主氣會於約60秒內自動截斷

### Features and Benefits

- Powerful Mandarin burner with high quality cast iron grate
- Body constructed with high quality stainless steel for hygiene, food safety and resistance to corrosion and oxidation
- Flame failure device (thermocouple) cuts off the gas supply if the pilot flame is out to avoid gas leakage

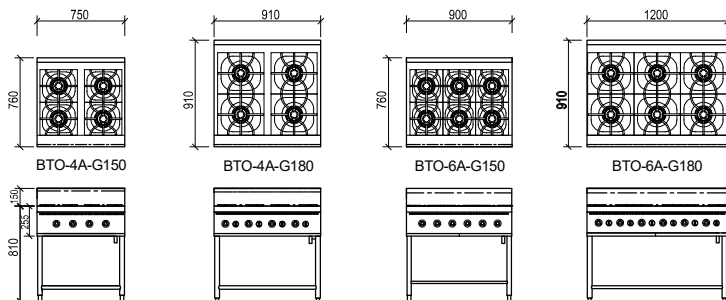

型號 Model No. ▶	四爐頭 4 Burner		六爐頭 6 Burner		
	BTO-4A-G150	BTO-4A-G180	BTO-6A-G150	BTO-6A-G180	
闊 x 深 x 高 (毫米)	Width x Depth x Height (mm)	750x760x(810+150)	910x910x(810+150)	900x760x(810+150)	1200x910x(810+150)
淨重 / 毛重 (公斤)	Net / Gross Wt. (kgs)	45 / 95	50 / 100	50 / 105	58 / 113
熱輸入量 千瓦 (英熱單位 / 小時) / 操作氣壓 (水柱毫米) Heat input kW (BTU / hr.) / Operating Pressure (mm water column)					
煤氣	Town Gas	20 (68260) / 100	30 (102390) / 100	30 (102390) / 100	45 (153585) / 100
石油氣	L.P. Gas	18 (61434) / 280	28 (95564) / 280	27 (92151) / 280	42 (143346) / 280
天然氣	Natural Gas	22 (75086) / 200	32 (109216) / 200	33 (112629) / 200	48 (163824) / 200
燃料接口 (毫米)	Fuel pipe connection (mm)	Ø25			
煤氣 / 石油氣 / 天然氣	Town Gas / L.P. Gas / Natural Gas				
備註		Remarks			
此產品適合: 煤氣, 石油氣, 天然氣使用 (採購前必須列明氣體種類)		Fuels suit for: Town Gas, L.P. Gas, Natural Gas (Pls specify gas type when ordering).			

## 平面 · 坑型石仔扒爐 Gas Griddle · Gas Charbroiler



GGT-3-G



GCT-3-G

### 特徵與優點

- 配U型強力爐頭及獨立爐火開關
- 高質全不銹鋼構造，符合食物安全標準及確保高抗蝕性以提昇產品耐用度
- 配備熄火安全制及感應線，如若火種熄滅，主氣會於約60秒內自動截斷。
- 標準配件包括點火棒方便操作

### Features and Benefits

- Powerful U-shape burner with individual control valve
- Body constructed with high quality stainless steel for hygiene, food safety and resistance to corrosion and oxidation
- Flame failure device (thermocouple) cuts off the gas supply if the pilot flame is out to avoid gas leakage
- Equipped with pilot lighter

平面扒爐 Gas Griddle	座檯式 Table Top Type		座地式 Free Standing Type		
	型號 Model No. ▶	GGB-2-G	GGB-3-G	GGT-2-G	GGT-3-G
闊 (扒面) 毫米	Width (Grill Surface) mm	600 (500)	900 (800)	600 (500)	900 (800)
深 (扒面)	Depth (Grill Surface)	760 (530)	760 (530)	760 (530)	760 (530)
高	Height	360+125	360+125	810+125	810+125
淨重 / 毛重 (公斤)	Net / Gross Wt. (kgs)	75 / 105	85 / 120	90 / 130	100 / 150
熱輸入量 千瓦 (英熱單位 / 小時) / 操作氣壓 (水柱毫米) Heat input kW (BTU / hr.) / Operating Pressure (mm water column)					
煤氣	Town Gas	11 (37543)/100	16.5 (56314) / 100	11 (37543)/100	16.5 (56314) / 100
石油氣	L.P. Gas	11 (37543)/280	16.5 (56314) / 280	11 (37543)/280	16.5 (56314) / 280
天然氣	Natural Gas	11 (37543)/200	16.5 (56314) / 200	11 (37543)/200	16.5 (56314) / 200
燃料接口 (毫米)	Fuel pipe connection (mm)	Ø20			
煤氣 / 石油氣 / 天然氣	Town Gas / L.P. Gas / Natural Gas				
坑型石仔扒爐 Gas Charbroiler	座檯式 Table Top Type		座地式 Free Standing Type		
	型號 Model No. ▶	GCB-2-G	GCB-3-G	GCT-2-G	GCT-3-G
闊 (扒面) 毫米	Width (Grill Surface) mm	560 (460)	870 (760)	560 (460)	870 (760)
深 (扒面)	Depth (Grill Surface)	760 (500)	760 (500)	760 (500)	760 (500)
高	Height	360+50	360+50	810+50	810+50
淨重 / 毛重 (公斤)	Net / Gross Wt. (kgs)	85 / 115	95 / 120	100 / 140	110 / 160
熱輸入量 千瓦 (英熱單位 / 小時) / 操作氣壓 (水柱毫米) Heat input kW (BTU / hr.) / Operating Pressure (mm water column)					
煤氣	Town Gas	11 (37543)/100	16.5 (56314) / 100	11 (37543)/100	16.5 (56314) / 100
石油氣	L.P. Gas	11 (37543)/280	16.5 (56314) / 280	11 (37543)/280	16.5 (56314) / 280
天然氣	Natural Gas	11 (37543)/200	16.5 (56314) / 200	11 (37543)/200	16.5 (56314) / 200
燃料接口 (毫米)	Fuel pipe connection (mm)	Ø20			
煤氣 / 石油氣 / 天然氣	Town Gas / L.P. Gas / Natural Gas				
備註		Remarks			
此產品適合: 煤氣, 石油氣, 天然氣使用 (採購前必須列明氣體種類)		Fuels suit for: Town Gas, L.P. Gas, Natural Gas, (Pls specify gas type when ordering).			