環保型蒸櫃
Environmental Steam Cabinet

特徵與優點

- 配備大火力噴射爐頭快速加熱，產生蒸氣只需約8分鐘
- 重力門鉸及門板可作承托方便廚師裝卸食物 (下拉門型號適用)
- 每層蒸箱配獨立蒸氣拉手開關
- 配備熄火安全制及感應線，如若火種熄滅，主氣會於約60秒內自動截斷
- 全304不銹鋼外殼，符合食物安全標準，衛生清潔
- 配備電子點火裝置，方便操作
- 自動入水及超溫保護制保護水膽

Features and Benefits

- Fast & powerful steam generation: from cold to full steam in only 8 minutes
- Efficient four tube turbo jet burner provides quick and even heating (operating noise level at 70dB approx.)
- Door provides support for trays when loading and unloading (for drop-down type door only)
- Steam control for each compartment
- Flame failure device (thermocouple) cuts off the gas supply if the pilot flame is out to avoid gas leakage
- #304 stainless steel exterior for hygiene and resistance to corrosion and oxidation
- Automatic electronic ignition
- Auto-fill water and overheat thermostat to protect boiler tank from damage

SCE-1CG-N2　SCE-2CG-N2　SCE-3CG-N2

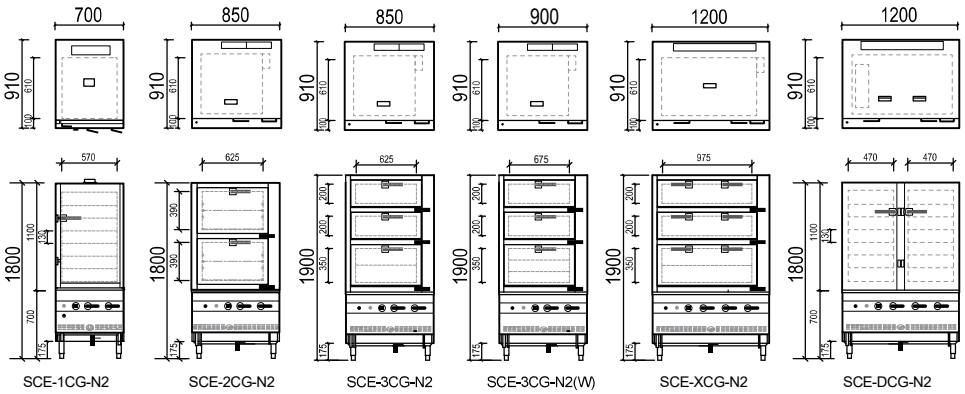

SCE-1CG-N2　SCE-2CG-N2　SCE-3CG-N2　SCE-3CG-N2(W)　SCE-XCG-N2　SCE-DCG-N2

		單門 Single Door	雙門 Two Door	三門 Three Door		三門加闊式 Three Door Extra Large	雙門對開式 Two Door Butterfly Open Type
	型號 Model No. ▶	SCE-1CG-N2	SCE-2CG-N2	SCE-3CG-N2	SCE-3CG-N2(W)	SCE-XCG-N2	SCE-DCG-N2
闊 x 深 x 高 (毫米)	Width x Depth x Height (mm)	700 x 910 x 1800	850 x 910 x 1800	850 x 910 x 1900	900 x 910 x 1900	1200 x 910 x 1900	1200 x 910 x 1800
淨重 / 毛重 (公斤)	Net / Gross Wt. (kgs)	180 / 250	190 / 265	190 / 265		230 / 320	230 / 320
爐頭數量	Qty of Burner(s)	4				6	
熱輸入量 千瓦（英熱單位 / 小時）/ 操作氣壓 (水柱毫米)	Heat input kW (BTU / hr.) / Operating Pressure (mm water column)						
煤氣 石油氣 天然氣	Town Gas L.P. Gas Natural Gas	48 (163824) / 100 50 (170650) / 280 48 (163824) / 200				72 (245736) / 100 75 (255975) / 280 72 (245736) / 200	
燃料駁口 (毫米) 煤氣 / 石油氣 / 天然氣	Fuel pipe connection (mm) Town Gas / L.P. Gas / Natural Gas	Ø25					
來水 / 去水駁口 (毫米)	Water inlet / Drainage pipe (mm)	Ø15 / Ø38					
不銹鋼層網 (數量)	S/S slatted bar shelf (Qty)	7	4	4	7	4	14

不銹鋼層網
Stainless steel slatted bar shelving

備註	
另選配件:	• Ø430mm 飯盆
此產品適合:	煤氣，石油氣，天然氣使用 (採購前必須列明氣體種類)
用具如置於供應硬水之地區使用，應在入水口前加上軟水裝置以減低礦物質積聚對用具內熱交換式內膽可引致之損壞。	
如欲查閱CE / ETL認證型號，請參照CE / ETL系列產品目錄	

Remarks	
Optional Accessories:	• Ø430mm Rice Pan
Fuels suit for:	Town Gas, L.P. Gas, Natural Gas (Pls specify gas type when ordering).
If any of these units will be installed in area with hard water supply, water softener shall be installed before water inlet of the unit to avoid any damages may occur to the heating chamber.	
Please refer to CE / ETL booklet for CE / ETL certified models.	